


# Telephone ringer A100T

**Comax**  
Signaltechnik



## General Information

Compact electronic sound generator with 3 different tones. Volume control. Supply directly from the telephone. Degree of protection IP66.

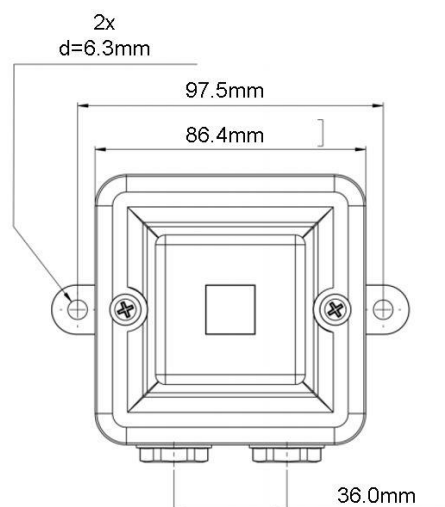

## Technical data

Case	ABS, shock-resistant
Colour of case	red (RAL3000)
Degree of protection	IP66 according to EN60529
Temperature range	-25°C to +55 °C
Relative humidity	90% at 20°C
Duty cycle	continuous operation
Tonalities	choice of 3 different tones
Connection	
- cable entry	2x M20 with stopping plugs 1 knock-out hole on bottom
- lead	terminals 0.5 - 2.5mm
-connection	Directly to ab-telephone line
Supply voltage	48VDC +/-10%
Power consumption	27mA
Weight	0.260 kg
Approval	GOST-R

## Order data

### Item number

A100T.000.1

Subject to change without prior notice

### Output

approx. 100dB (A) 1m

