Sounder/Strobe with Telephone relays AL100T

Comax
Signaltechnik

General Information

Universal alarm sounder for manifold uses. Alarm sounder with 32 different tones selectable. Automatic synchronization of several units. Volume control. Audibility up to 32m. Strobe light in 7 different colours. Degree of protection IP66. Supply directly from the telephone.
Option: tropicalized version

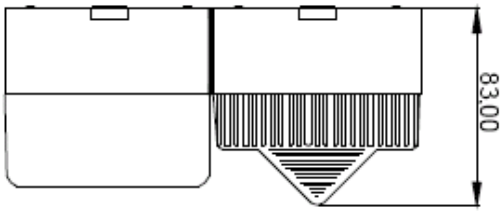

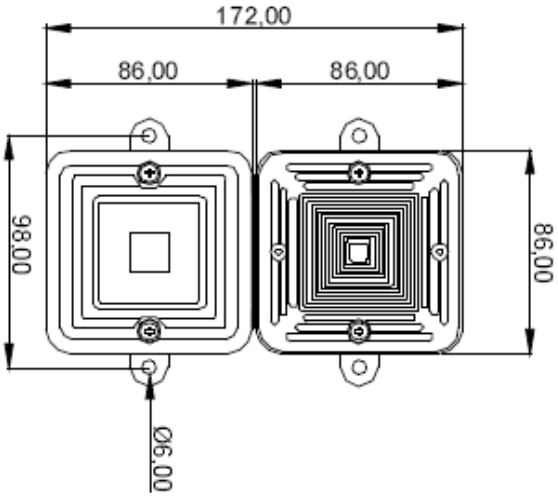

Technical data	
Case	ABS, shock-resistant
Colour of case	red (RAL3000)
Dome	PC shock-resistant
Dome colours	red, amber, yellow, green, blue, clear, white
Strobe light	5 Joule
	250cd (lens clear)
Degree of protection	IP66 according to EN60529
Temperature range	-25°C to +55 °C
Relative humidity	90% at 20°C
Duty cycle	continuous operation
Tonalities	choice of 3 different tones
Connection	
- cable entry	knock-out holes on side and bottom
- lead	terminal up to 2.5mm
Weight	0.460 kg
Approval	GOST-R

Order data

Item number	Rated voltage	Sound intensity level	Current consumption
AL100.230.7*03	230VAC	approx. 100dB(A),1m	50mA

Colours 1= red, 2= amber, 3= yellow, 4= green, 5= blue, 6= white, 7= clear

Subject to change without prior notice

CE

Comax Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E- mail@comax.ch Internet www.comax.ch