

Telephone signal ZW2

Comax
Signaltechnik


General information

Additional Telephone signal. Power supply from telephone



Technical data

Case	Aluminium
- colour	black
Cover	Macrolon resistant to UV light
Connection	terminals for 1,5mm ²
Mounting	wall or roof
Cable gland	1x M20 x1,5
Connection	terminals W, Lb
Signal	through loudspeaker: signal with one, two or three sounds
Sound frequency	4 different options to be selected with DIP-switch from 5Hz to 20Hz
Impedance	at 25Hz Z >= 8R at 50Hz Z >= 4R
Temperature range	-20°C bis +40°C
Degree of protection	IP66
Weight	approx. 0,5Kg

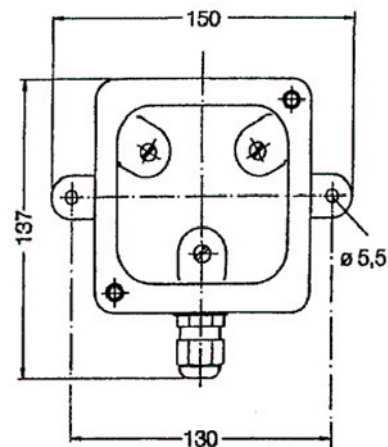

Order data

Item number	Rated voltage	Ripple voltage	Output
ZW2.075.1	24-75VAC	0-63VDC	approx. 90dB(A) 1m

Technical details may change without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E-mail@comax.ch Internet www.comax.ch

E_ZW2_REV0_21_02_2013