


Sounder with LED strobe SYWA


Comax
Signaltechnik



- Wall mounting
- Minimum height 2,4m (x)
- Coverage 7,5m/2.5m (y)
- Frequency 1Hz/0,5Hz
- min. current 15mA
- For outside use
- **EN54-23 Code W-2.4-7.5**

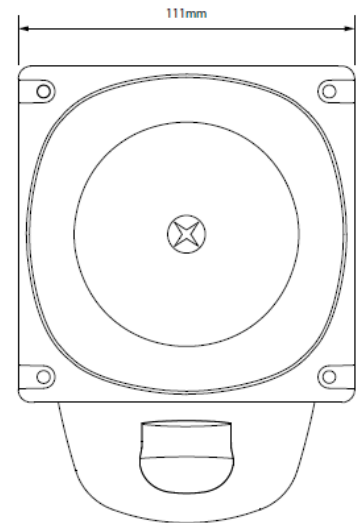


Technical data	
LED-Strobe	
Colours	red or white
Frequencies	1Hz or 0,5Hz (switchable)
Sounder	
Output	100dB (A) (tone 29)
Monitoring	reverse polarity
EN54-23	
Mounting	Wall
Coverage (y)	7,5m or 2.5m (switchable)
Mounting height (x)	min. 2,4m
Coverage volume	135m ³ (60m ³)
Case	
Material	ABS
-colours	red or white
Degree of protection	IP66
Temperature range	-25°C up to 70°C
Weight	200g
Approval	EN54-23

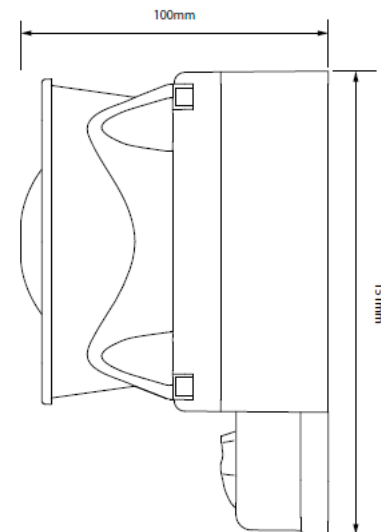

Order data				
No. of article	Tension	Frequency	Output	Current
SYWA.024.2 ^{1 2}	18-28VDC	1 Hz/0,5Hz	100dB	15-30mA
² colours of LED	1 = red 6 = white			
¹ colours of case	1 = red 6 = white			

Technical modifications without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E-mail@comax.ch Internet www.comax.ch