


Sounder with LED strobe SPW


Comax
Signaltechnik



- Wall mounting
- Minimum height 2,4m (x)
- Coverage 7,5m/2,5m (y)
- Frequency 1Hz/0,5Hz
- min. current 22mA
- **EN54-23 Code W-2.4-7.5**

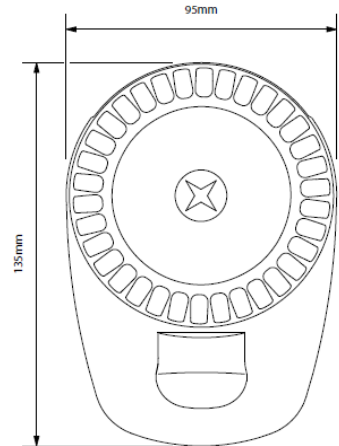


Technical data	
LED-Strobe	
Colours	red or white
Frequencies	1Hz or 0,5Hz (switchable)
Sounder	
Output	102dB (A) (tone 3)
Monitoring	reverse polarity
EN54-23	
Mounting	Wall
Coverage (y)	7,5m or 2,5m (switchable)
Mounting height (x)	min. 2,4 m
Coverage Volume	135m ³ or 15m ³
Case	
Material	ABS
-colours	red or white
Degree of protection	IP65
Temperature range	-25°C up to +70 °C
Weight	200g
Approval	EN 54-23

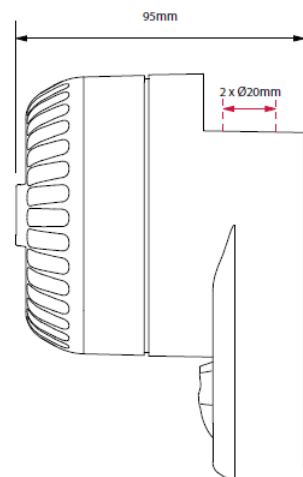

Order data				
Article No.	Tension	Frequency	Output	Current
SPW.012.2 ^{1 2}	9-15VDC	1 Hz/0,5Hz	102dB	22-37mA
SPW.024.2 ^{1 2}	18-28VDC	1 Hz/0,5Hz	102dB	22-37mA

² LED colours	1 = red ,6 = white
¹ Case colours	1 = red, 6 = white

Technical modifications without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E-mail@comax.ch Internet www.comax.ch