


Electronic Alarm Sounder SON / SONH

Comax
Signaltechnik




General information

Compact electronic alarm sounder. 10 programmable tones. Volume adjustable (only SON). Automatic synchronisation on multi sounder system. Degree of protection IP66. Option: tropicalized version, UL approval, case w/o fixing lugs

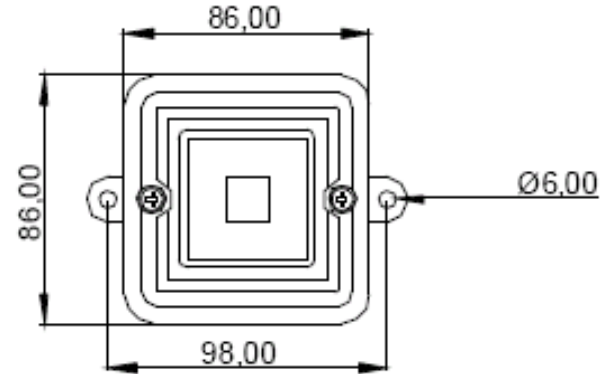

Technical data

Case	ABS, shock resistant
Colour of case	red (RAL3000)
Degree of protection	IP66 according to EN60529
Temperature	-25°C to +55°C
Duty cycle	Continuous operation
Tonalities	Choice of 10 different tones (see table)
Connection	
- cable entry	holes for M20 cable glands on sides and bottom
- mounting	flush- or surface-mounting
- lead	Terminal up to 1.5 mm ²
Weight	0.300 kg
Approval	VdS according to EN54-3 (only SON), GOST-R

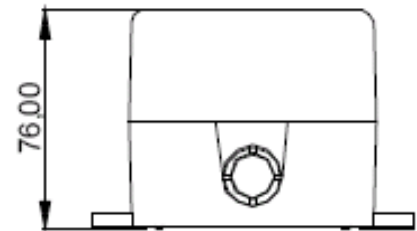

Option: case w/o fixing lugs

Order data

Item number	Rated voltage	Max. sound intensity level	Current consumption
SON.024.2	10-30VDC	approx. 100dB(A), 1m	25mA at 24VDC
SON.024.7	24VAC	approx. 100dB(A), 1m	40mA
SON.115.7	115VAC	approx. 100dB(A), 1m	13mA
SON.230.7	230VAC	approx. 100dB(A), 1m	13mA
SONH.024.2	18-30VDC	approx. 105dB(A), 1m	80mA at 24VDC

Subject to change without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E-mail@comax.ch Internet www.comax.ch