

# Mini-Strobe light MS

## General information

Mini-Strobe light with intense xenon flash! Delivery in two parts: drive unit and lamp unit. Consequently, lamp and drive unit can be mounted separately!


High degree of protection IP67!

For multiple applications, e.g. security or building control



## Technical data

Base	Synthetic rubber, white
Lens	Acryl
-colour	red, amber, blue, green clear
Degree of protection	IP67 according to EN 60529
Connection	cabl
Operation	continuous
Installation	free
Temperature	-20°C up to +50°C
Weight	Approx. 0,065kg
Dimensions	Drive unit: 62x33x22mm Lamp unit: 79x31x21mm

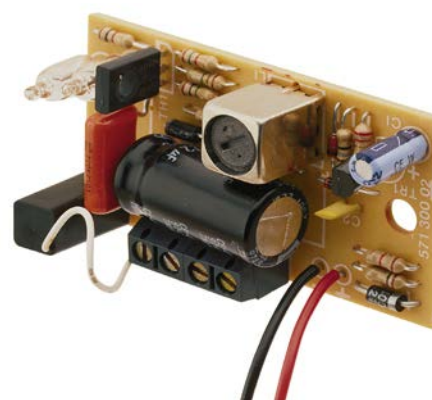

## Order data

No. of article	Nominal tension	Power output	Current consumption	Flash frequency
MS1.012.2*	12VDC	1 Joule	115mA	approx. 60flashes/min.
MS1.024.2*	24VDC	1 Joule	55mA	approx. 60flashes/min.

\*lens colours      1 = red, 2 = amber, 4 = green, 5 = blue, 7 = clear

Technical data may be changed without prior notice

