LED Multifunction signal light BLEL

Comax
Signaltechnik

General information

Robust optical LED multifunctional signal light for inside or outside use. Four different settings: Status light, Flashing light, Strobe light and Revolving flash light. For continuous operation. IP66

Technical data

Case	PC, mounting angle V4A
-colour	grey
Lens	PC
-colour	clear
LED colour	red, amber, green, blue, clear
Operation mode	Status light, Flashing light, Strobe light, Revolving flash light can be selected on the board
Cable gland	M20, 2x blank plug M20
Degree of protection	IP66 according to EN 60529
Installation	free
Temperature range	-40°C up to +65°C
Weight	about 1.3 kg

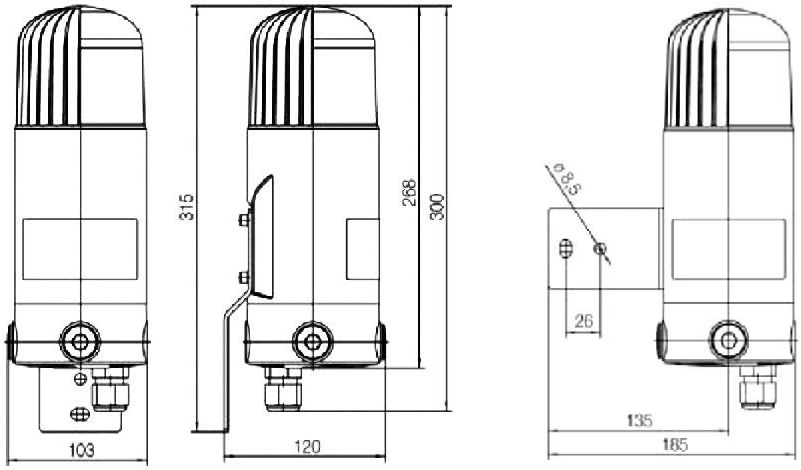

Order data

No. of article	Nominal tension	Current	
BLEL.024.2*	24 VDC	770mA-1650mA	depending on LED colour
BLEL.230.1*	85-265 VAC	140mA-210mA	depending on LED colour

*LED colours	1 = red, 2 = amber, 4 = green, 5 = blue, 7 = clear

Without prior notification of technical modifications

CE

Comax Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E- mail@comax.ch Internet www.comax.ch