

# Panel mount buzzer DMC

## General information

Panel mount buzzer with continuous or intermittent sound. Built-in volume control provides attenuation up to 20dB. Quick connecting Faston-terminals. For holes with diameter 28mm.


For applications on control boards or in the machine industry.




## Technical data

Dimensions	Ø 32,8mm x 38,2mm
Case	Noryl N-190 (UL 94-VO)
-colour	black
Temperature range	-20°C up to +65°C
Operation	continuous
Installation	Panel mount, holes Ø 28mm
Connection	Faston-terminals 6,3mm
Degree of protection	IP65 according to EN60529 Salt spray according to ASTM B117 Vibrations up to 55Hz on all axes
Sound	Continuous or intermittent sound 2900Hz +/-250Hz
Life cycle	10 years under normal operating conditions
Approvals	UL (on request)


### REAR VIEW




### SIDE VIEW

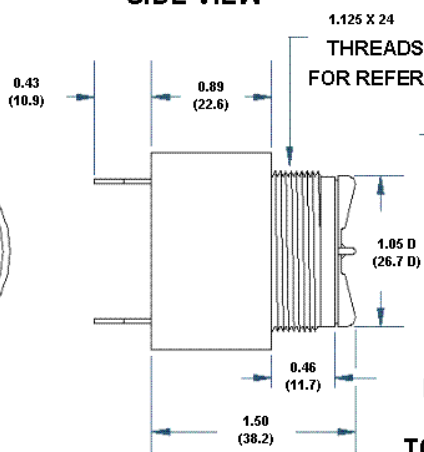

### RING




### FRONT VIEW



DIMENSIONS ARE IN: (mm)


TOLERANCES ARE: ±0.03 (±0.76)

### PANEL MOUNTING



FITS PANELS UP-TO  
0.25 (6.3) THICK

### „Q“ Terminals

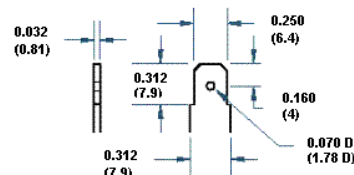

## Order data

No. of article	Nominal tension	Sound	Output	Current
DMC.024.2	5-30VDC	continuous or intermittent	95dB at 60cm distance	2-20mA
DMC.048.2	9-48VDC	continuous	95dB at 60cm distance	5-20mA
DMC.115.1	30-120VAC	continuous	95dB at 60cm distance	7-40mA
DMC.230.1	130-230VAC	continuous	95dB at 60cm distance	20-40mA

Optional: UL Approval

Modifications of technical data without prior notice

