

Lift alarm LAX


Comax
Signaltechnik

General information

Compact alarm for elevators. Large range of nominal tension. Low current consumption. Control of sound output. IP68.

Technical data

| | |
|----------------------|--|
| Case | ABS, shock resistant |
| Colour | gray |
| Buzzer | Noryl N-190 (UL94-VO) |
| Degree of protection | IP68 according to EN 60529 |
| Temperature range | -20°C up to +65°C |
| Relative humidity | 95% at 40°C |
| Tone | Intermittent tone at 2900Hz (+/- 250Hz) |
| Operation | continuous |
| Supply: | |
| -cable entry | hole for cable up to \varnothing 12 mm |
| -installation | surface or flush |
| -lead | faston 6,3mm |
| Weight | ca. 0.18 kg |

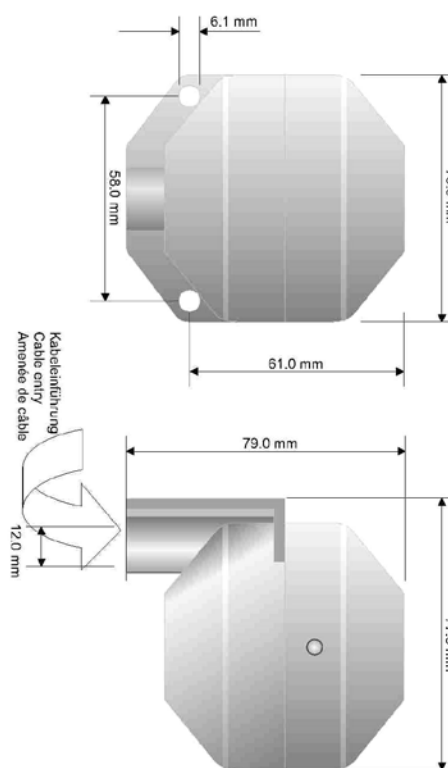

Order data

| No. of article | Nominal tension | Sound output | Current |
|----------------|-----------------|--|---------------------------|
| LAX.012.2 | 5-15VDC | ca. 92dB(A) 60cm at 5V ca. 103dB(A) 60cm at 15V | 10mA at 5V 50mA at 15V |

Modification of technical specifications without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E-mail@comax.ch Internet www.comax.ch