

Ex II Signalling Hooter mHP 12

High-volume signalling device for applications in zones 1 and 2



Overview

The mHP 12 Ex Signalling Hooter is designed for warning purposes in potentially explosive areas of zones 1 and 2. The hooter is available with the common supply voltages and produces a sound level of approx. 108 dB(A).

The device is driven by a powerful, non-polarized electromagnet with an adjustable tappet that hits the membrane 100 to 120 times per second.

Features

- Ingress protection IP 54
- Protection class II
- Protection type: II 2 G Ex em b IIC T4 Gb
- Volume: approx. 108 dB(A)
- Cable gland M20 x 1.5

EATON

Powering Business Worldwide





Certification

Protection type II 2 G Ex em b IIC T4 Gb


Specifications

Housing	Polycarbonat
Colour	Black
Ingress protection	IP 54 according to IEC 60529
Protection class	II
Cable gland	M20 x 1,5
Connection terminals	Terminal capacity 2.5 mm ²
Operating conditions	Indoors and outdoors
Operating position	Sound outlet facing downward
Duty cycle	ED 75 %
Volume	Approx. 108 dB(A), in 1 m distance
Temperature range	
Operation	-20 °C to +70 °C
Storage	-40 °C to +80 °C
Weight	ca. 1,1 kg

General arrangement drawing (all dimensions in mm)

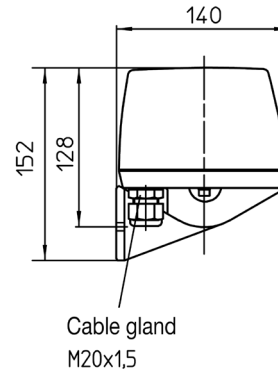

Wiring plan

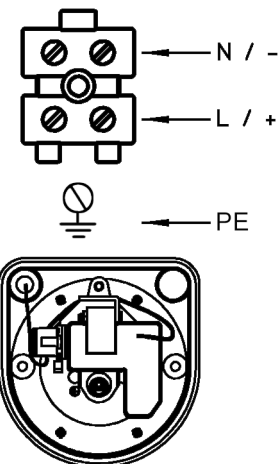

Ordering data

Type	Designation	Temperature class	Input voltage	Current consumption	Art. No.*
mHP 12	Signalling Hooter with cable gland	T4	24 VDC	0.3 A	FHF 401 030 111 210
mHP 12	Signalling Hooter with cable gland	T4	230 VAC	0.07 A	FHF 401 030 111 207

* All models are certified according to ATEX IECEx. INMETRO variants are available on request.

Comax Industrielle Signaltechnik AG Thalstrasse 279 CH-4712 Laupersdorf
Tel +41 (0)32 617 31 41 mail@comax.ch www.comax.ch