


Installation/Anschluss Installation/Raccordement Installation/Connection

Installationsanleitung_H110TR_REV2_02_06_2020.pdf

H110TR

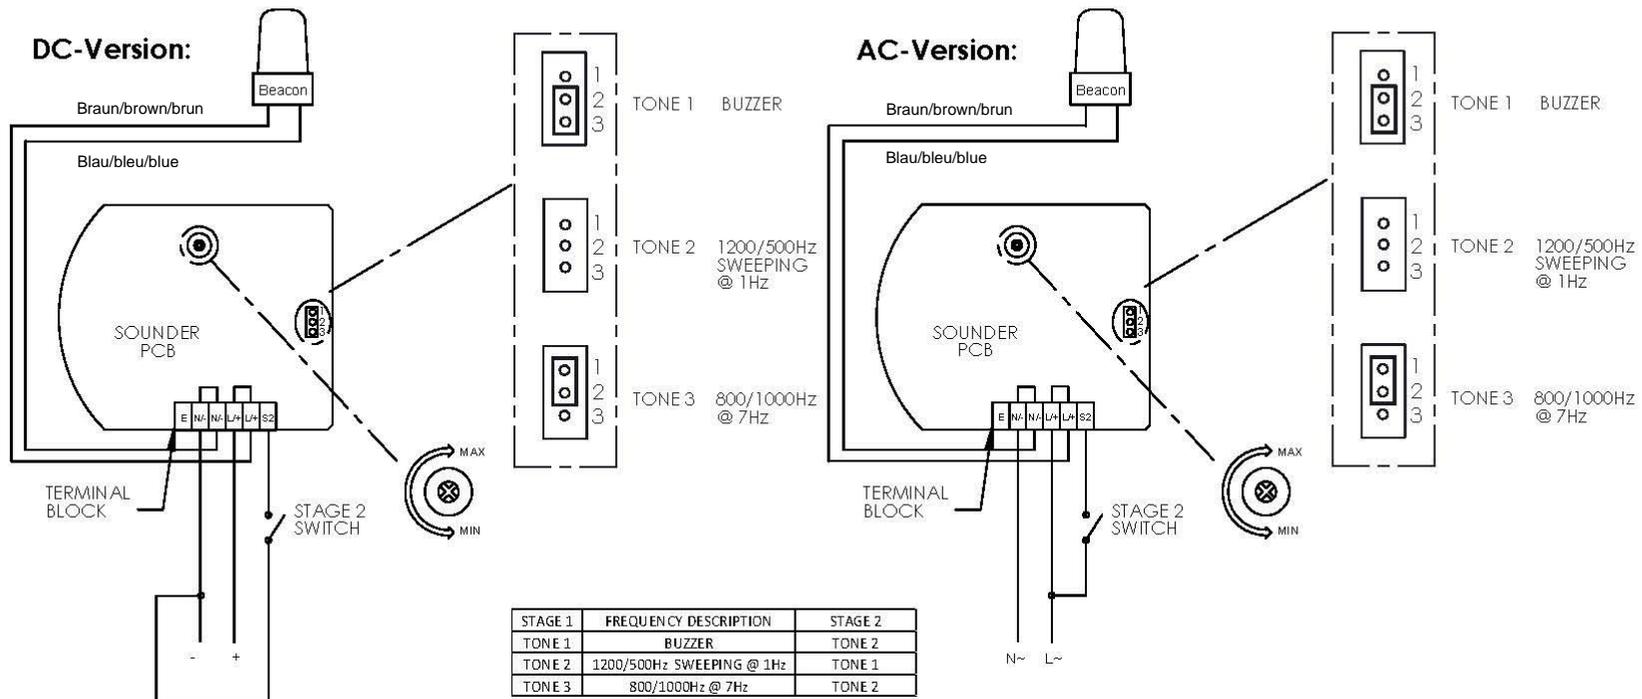

Trumpet Horn Rotating Beacon
IP Rating: IP65
Temp: -25 °C to +50 °C
Unit weight: 678g
CE

- 12V dc 52mA
- Beacon Current Consumption
- 12V dc 1.72A
- 24V dc 105mA
- Beacon Current Consumption
- 24V dc 910mA
- 115V ac 50/60Hz 36mA
- Beacon Current Consumption
- 115V ac 50/60Hz 216mA
- 230V ac 50/60Hz 18mA
- Beacon Current Consumption
- 230V ac 50/60Hz 117mA


Dimensions : 135 x 462.9mm
1.5mm² terminals
Cable entry: 1 x 5-7mm push through grommet

x = Lens colour
R = Red A = Amber
B = Blue C = Clear
G = Green Y = Yellow




Lebensgefahr durch elektrischen Strom! Dieses Gerät darf nur durch autorisierte Elektrofachkräfte und elektrotechnisch unterwiesene Personen montiert und angeschlossen werden.
Electric current! Danger to life! Only authorized or instructed persons may assemble and install this device.
Tension électrique dangereuse! Seuls les personnes averties sont autorisées d'assembler et d'installer ces produits.


A

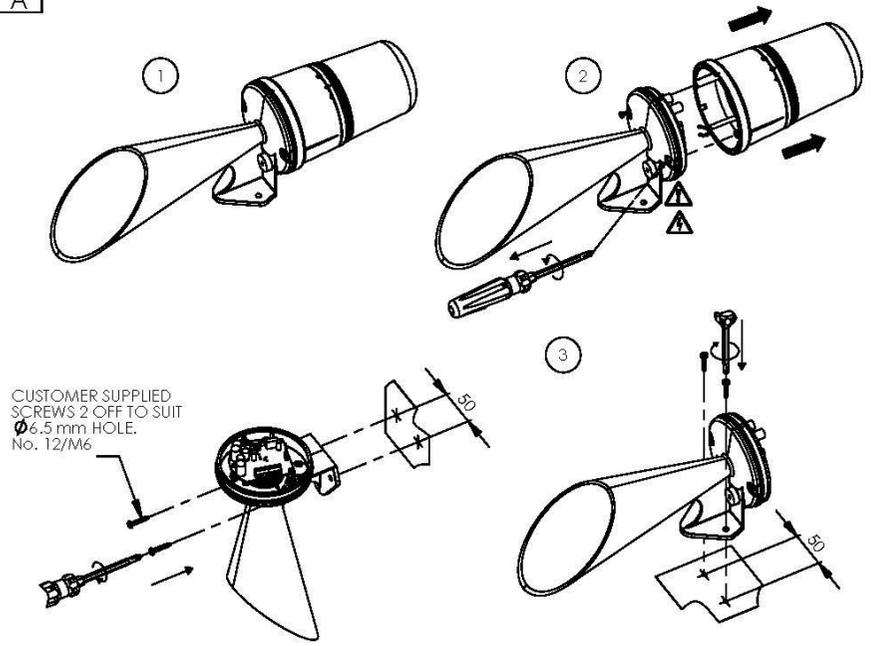

C

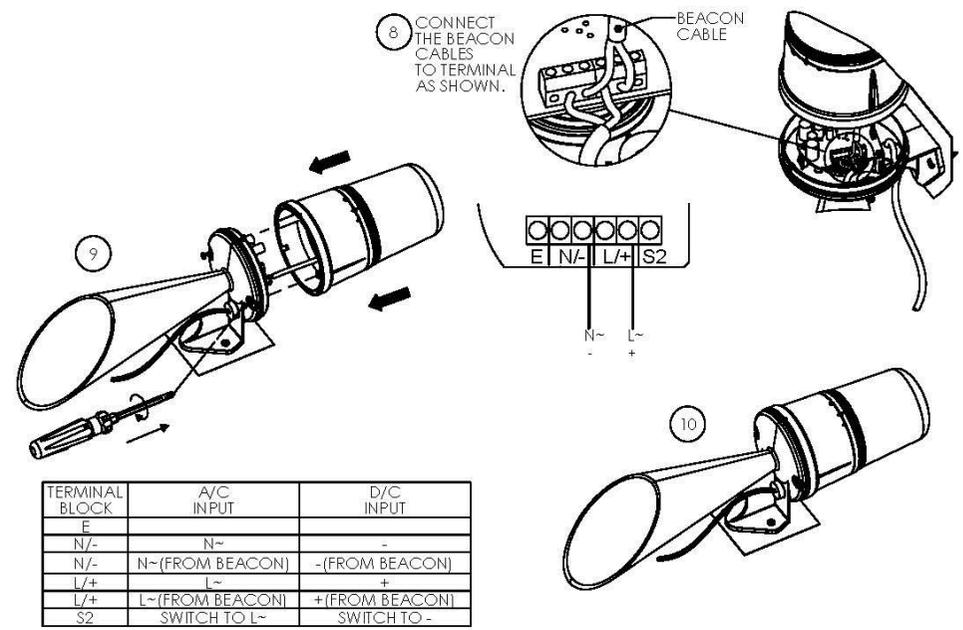

B

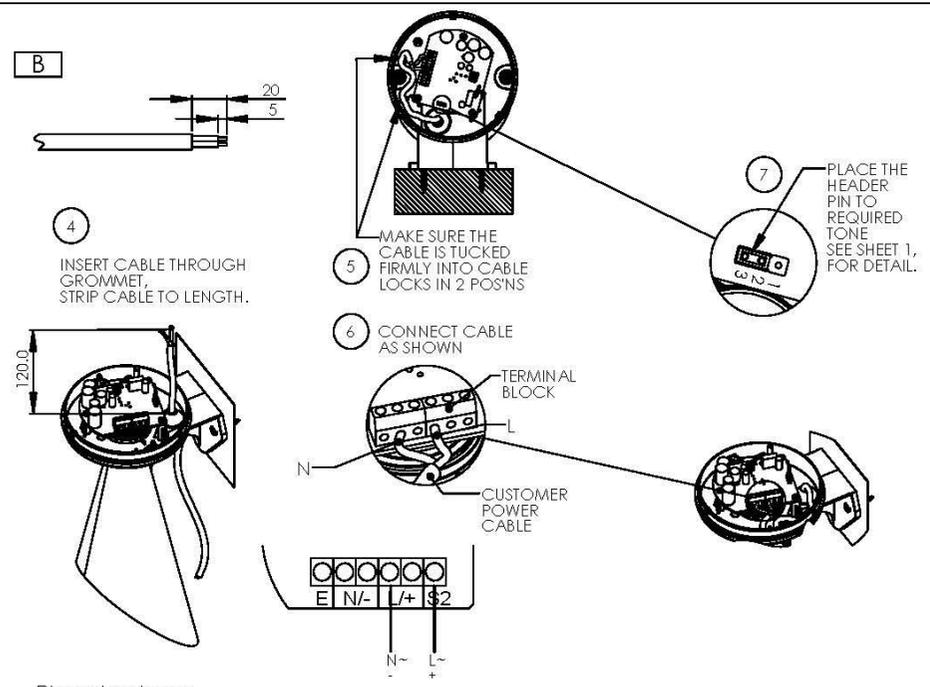

Dimensions in mm

D BULB REPLACEMENT

