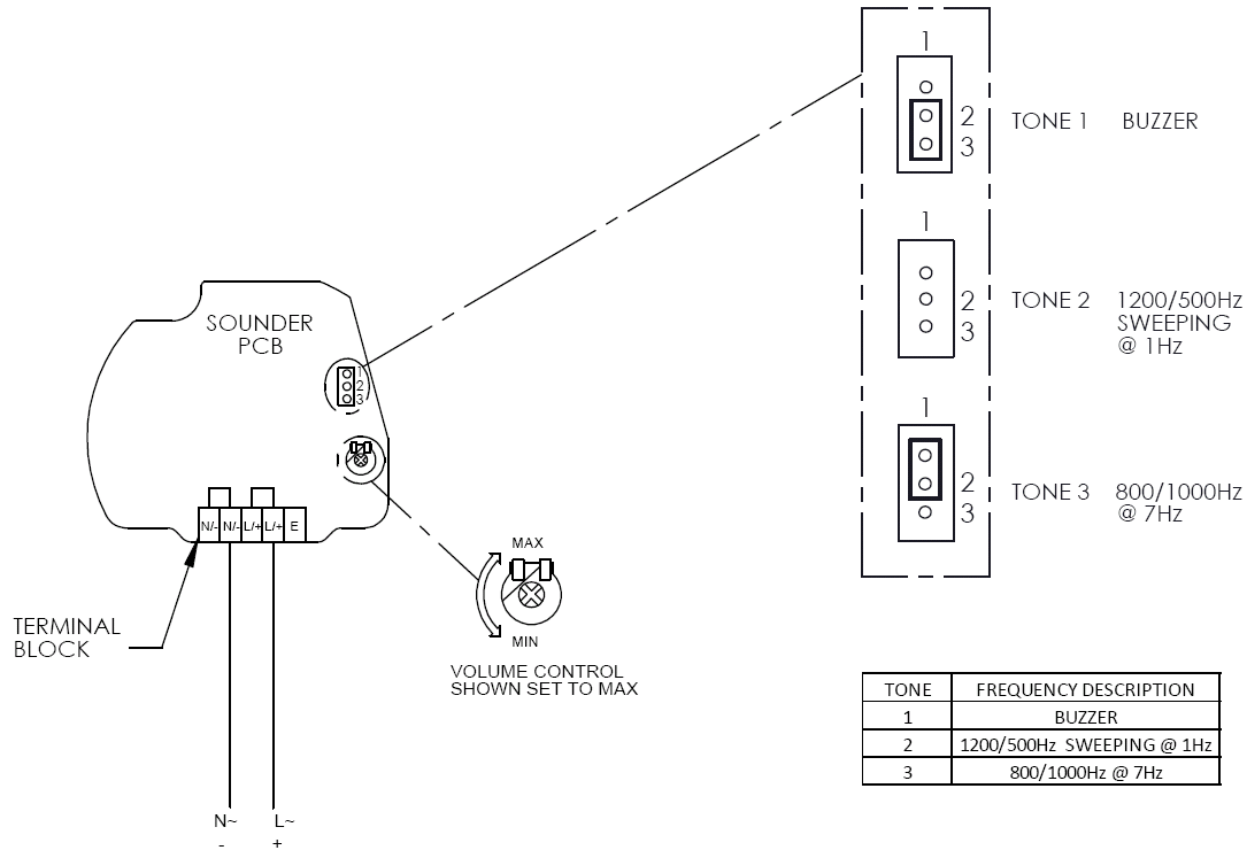


Installation/Anschluss
 Installation/Raccordement
 Installation/Connection

Installationsanleitung_H100T_REV0_26_02_2013.pdf

H100T



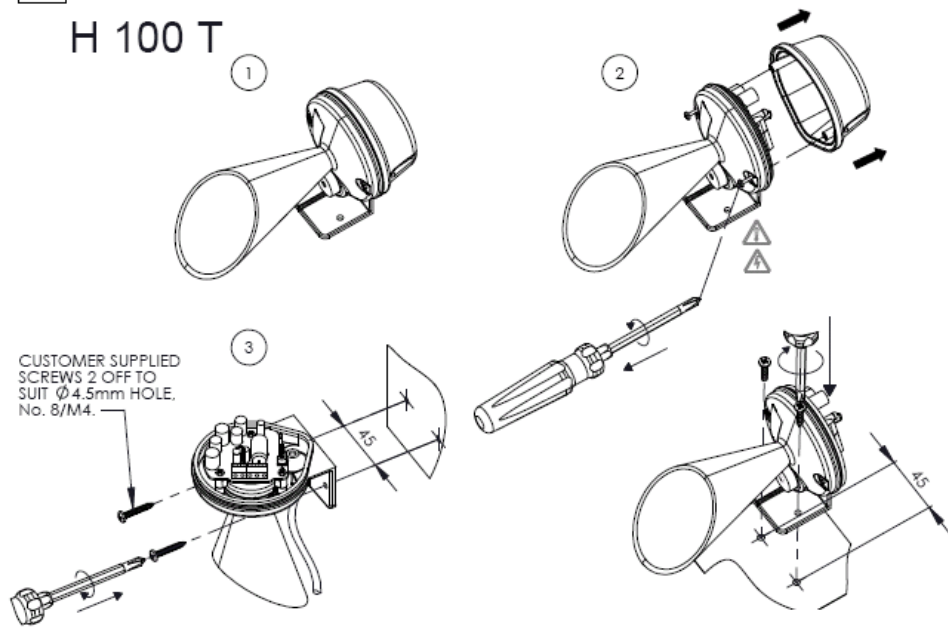
Dimensions : 94.2 x 177.5mm
 1.5mm² terminals
 Cable entry: 1 x 5-7mm push through grommet

Trumpet Horn
 IP Rating: IP65
 Temp: -25°C to +50°C
 Unit weight: 148g
 CE

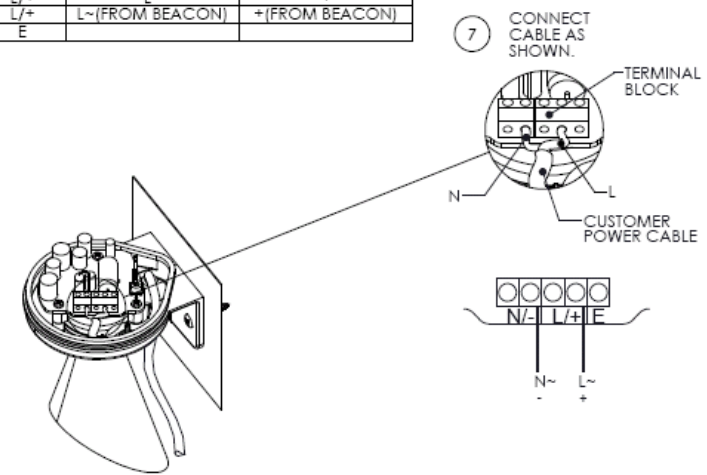
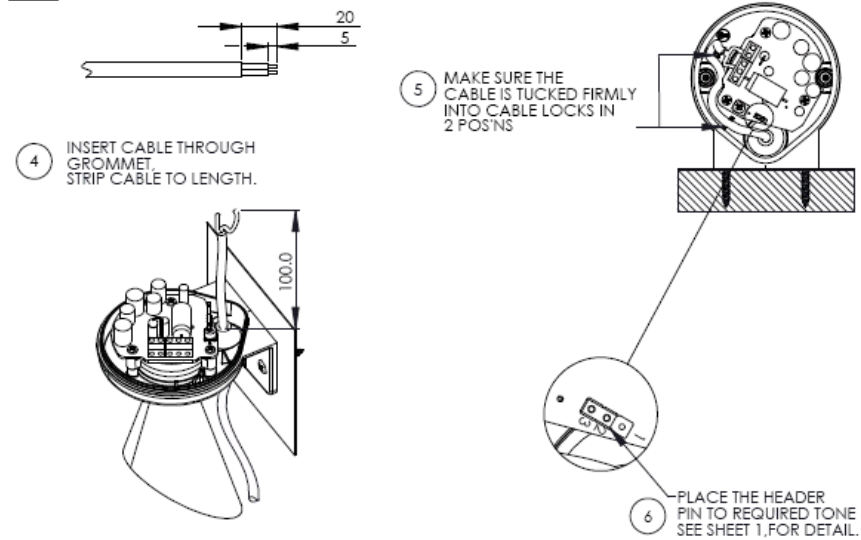
- 12V dc 10mA
- 24V dc 24mA
- 12V ac 50/60Hz 30mA
- 24V ac 50Hz 62mA
- 48V dc 15mA
- 48V ac 50/60Hz 25mA
- 115V dc 6mA
- 230V dc 3mA
- 115V ac 50/60Hz 19mA
- 230V ac 50/60Hz 10mA



Lebensgefahr durch elektrischen Strom! Dieses Gerät darf nur durch autorisierte Elektrofachkräfte und elektrotechnisch unterwiesene Personen montiert und angeschlossen werden.
Electric current! Danger to life! Only authorized or instructed persons may assemble and install this device.
Tension électrique dangereuse! Seuls les personnes averties sont autorisées d'assembler et d'installer ces produits.

A**H 100 T****C**

TERMINAL BLOCK	A/C INPUT	D/C INPUT
N/-	N~	-
N/+	N~(FROM BEACON)	-(FROM BEACON)
L/+	L~	+
L/+	L~(FROM BEACON)	+(FROM BEACON)
E		

**B****D**